

# FE5000

## FE5000 Multi-touch Capacitive HMI

- Multi-touch capacitive HMI, nimble touch, better light transmittance, anti-scratch, no drift
- Multi-gesture is supported, more friendly man-machine interactive experience
- High resolution, high brightness, IPS full view
- New configuration software with rich gallery and more powerful function



- Projected capacitive, multi-touch Glass+Glass touch screen.
- 17inch 1280\*1024 IPS LCD, high brightness, high contrast ratio, full viewing angle.
- Aluminum panel, metal frame, exquisite and metallic appearance, with only 31mm thickness.
- Industrial isolation power supply, spray coating treatment and applicable to various harsh environment.
- SD card Supporting.
- USB Device 2.0, high speed software downloading.
- USB Host: Supporting USB Disk/USB Keyboard/Mouse expanded device etc.
- Complied with RoHS certification.

## Technical Parameters

Display:	17" TFT LCD
Resolution(W x H):	1280×1024
Colors:	16-bit colors
Brightness:	350cd/m <sup>2</sup>
Backlight :	LED
Backlight Life:	50000 hours
Touch Panel:	Glass+ glass multi-touch capacitive HMI
CPU:	800MHz ARM Cortex A8
Memory:	256MB Flash + 256MB DDR3
RTC:	Built in
Ethernet :	10M/100M Ethernet
USB Port:	USB Device 2.0*1, USB Host 2.0*1
Download Project:	U-disk/USB Device/Ethernet
COM Port:	COM1/COM2 : RS232/RS485/RS422 ; COM3 : RS232

# Specifications

0  
3

## Electrical Specifications

Power Consumption	< 18W
Input Power	DC24V, Input Range: DC 18V~28V
Power Protection	Isolated Power, protected from thunderstrike and surging
Power Down Allowed	< 5mS
CE	CE, complied with EN61000-6-2:2005, EN61000-6-4:2007
RoHS	Complied with RoHS; Surge Immunity: $\pm 1KV$ , EFT: $\pm 2KV$ , ESD:4KV, Air:8KV

## Others


Opercating Temperature	-20~70°C
Storage Temperature	-30~85°C
Operating Humidity	10~90%RH(No condensation)
Vibration Endurance	10~25Hz (X/Y/Z 2G/30Min)
Cooling	Natural air cooling

## Environment Specifications

Degree of Protection	Front IP65(with NEMA panel), Back IP20
Shell Material	Front cover made by aluminum, and the surface with hard oxide treatment; Back cover made by galvanized sheet and the surface with dry spray treatment
Installation	Wall mounting
Dimension	392×325×62.5(mm)
Weight	About 5800g


# Ports Specifications

## Power

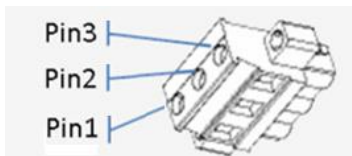


Pin1	DC24V
Pin2	0V
Pin3	FG

## COM1/COM3 (9DB)

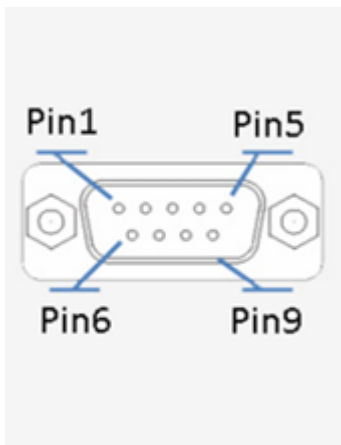


Pin1	Rx-(B)
Pin2	RxD_PLC (COM1 RS232)
Pin3	TxD_PLC (COM1 RS232)
Pin4	Tx-
Pin5	GND
Pin6	Rx+(A)
Pin7	RxD_PC/PLC (COM3 RS232)
Pin8	TxD_PC/PLC (COM3 RS232)

## COM2/COM4 (9DB)

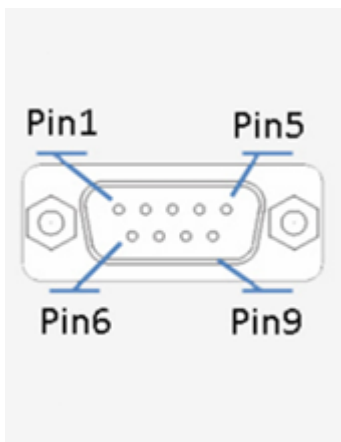


Pin1	Rx-(B)
Pin2	RxD_PLC (COM2 RS232)
Pin3	TxD_PLC (COM2 RS232)
Pin4	Tx-
Pin5	GND
Pin6	Rx+(A)
Pin7	-----
Pin8	-----
Pin9	Tx+

## Dimension

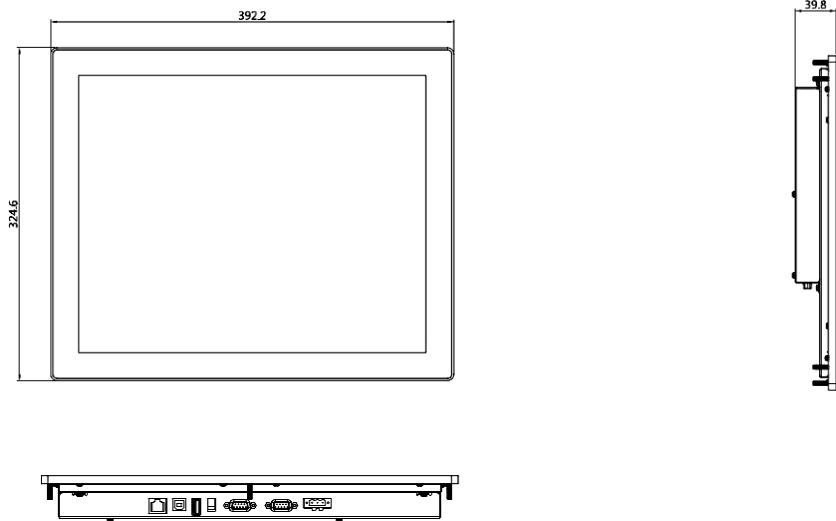

## Wall Mounting

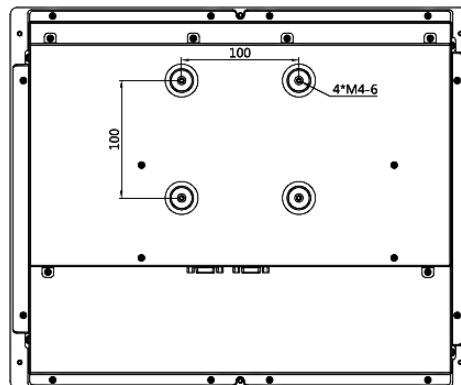

## Shanghai ( R&D )

Add. Room 804, C6 Building, No.52 Bay Valley Technology Park, Lane 1688 North Guoquan Road, Yangpu District, Shanghai, 200438  
Tel. +86-21-68683993  
Fax +86-21-65107569

## Suzhou

Add. Room 915, Ruiqi Building, No.668 Fengting Road, Suzhou Industrial Area, Suzhou.  
Tel. +86-512-69833996

## Shenzhen

Add. 5 Floor C, No.2 Building, Honglong High-tech Park (Lanyun Industrial Park), Liyuan Industrial Area, Zhuangchang Villiage, Langxin committee, Shiyan Street, Bao'an District, Shenzhen  
Tel. +86-755-27610682  
Fax +86-755-27629895

## Wuxi

Add. Room 1603, Taihu Lake Developing Building, No. 1890 West Lake Avenue, Binhu Area, Wuxi.  
Tel. +86-18505101982

## Beijing

Add. Room 303, Unit 4, Building 1, Caiman Street, No 67 Chaoyang Road, ChaoYang District, Beijing.  
Tel. +86-10-51388516  
Fax +86-10-51388681

Bussiness: 0755-27610681

Technical Support: 4008-033-022

E-mail: [sales@flexem.cn](mailto:sales@flexem.cn)

Website: [www.flexem.com](http://www.flexem.com)